

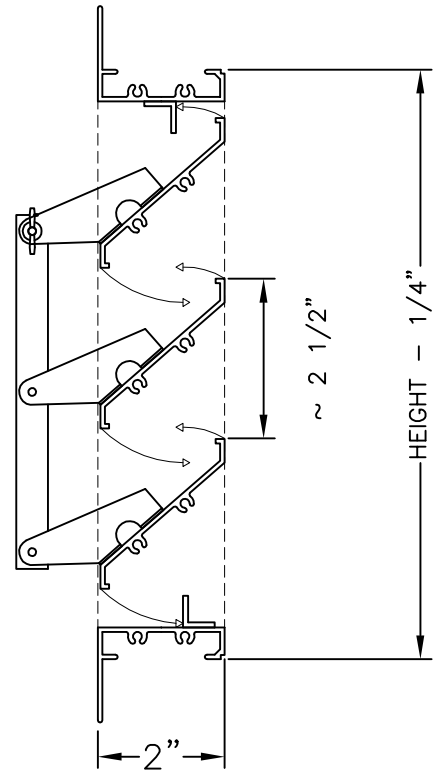


MODEL 245A U-dor
ADJUSTABLE 2" LOUVER
 with Front Control


Office: (780) 485-5535
 Facsimilie: (780) 485-5156

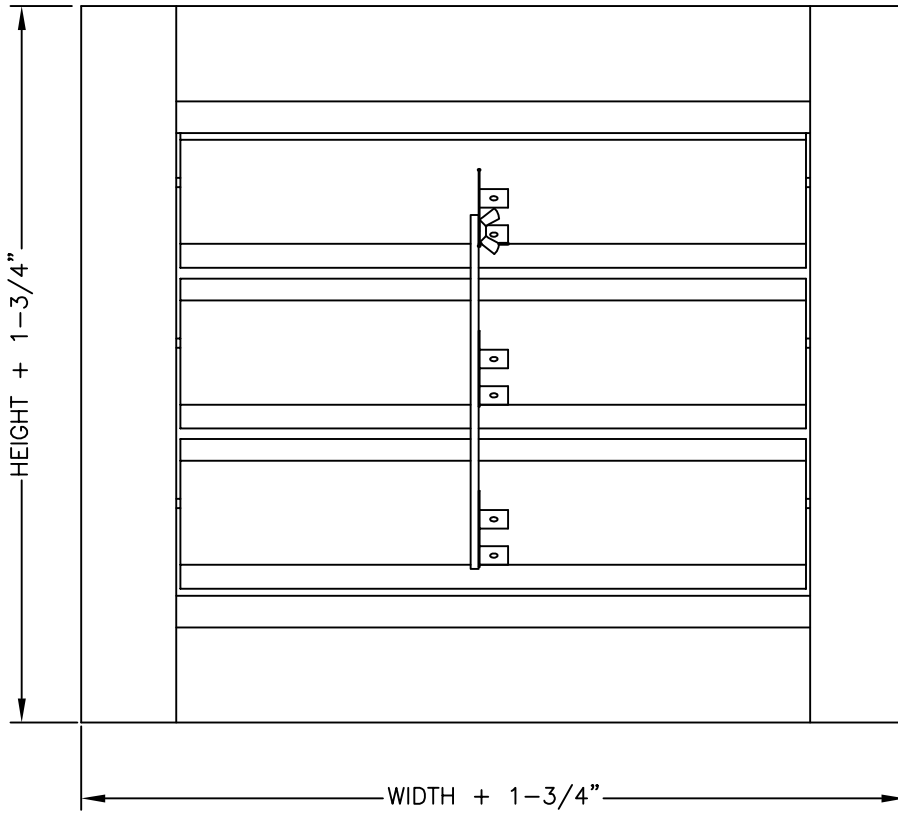

FLANGE FRAME
245AF (shown)



CHANNEL FRAME
245AC



SPECIFICATIONS

- FRAME** EXTRUDED ALUMINUM CHANNEL .070" THICKNESS.
- BLADES** EXTRUDED ALUMINUM .070". LINKED AND ADJUSTABLE.
- CONSTRUCTION** ASSEMBLED WITH CADMIUM PLATED STEEL SCREWS.
- LOCKING DEVICE** WINGNUT (shown)
SPRING AND CHAIN OPTIONAL
- AXLES** CADMIUM PLATED STEEL SCREWS.
- BIRDSCREEN** GALVANIZED SQUARE MESH FASTENED ON INSIDE FACE.

1/4" X 1/4" STANDARD
1/2" X 1/2" OPTIONAL
1" X 1" OPTIONAL
- SIZE** MAXIMUM 48" IN WIDTH,
MULTIPLE SECTIONS MADE OF EQUAL SIZES.

QTY.	WALL OPENING		LOUVER SIZE	
	WIDTH	HEIGHT	WIDTH	HEIGHT

PROJECT	
DATE	
ENGINEER	
CONTRACTOR	FILE #
SUPPLIER	DWG. #